
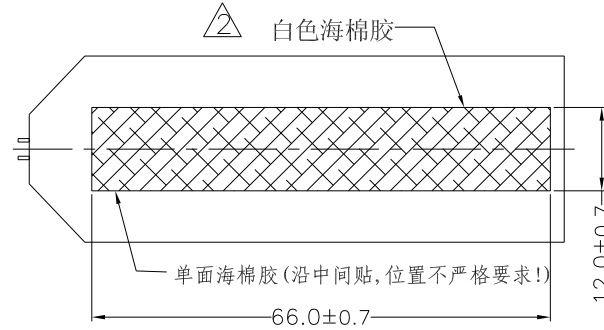



1. Mechanical Outline (Unspecified Tolerances is ± 0.3)

- 1. □ : CRITICAL DIMENSION.
- 2. : REFERENCE DIMENSION.
- 3. : SAFETY CHARACTERISTIC.
- 4. ▽ : SPECIAL CHARACTERISTIC.
- 5. : RoHS COMPLIANCE.

ISSUE	AMENDMENT	DATE
A0	First Issue	20060927

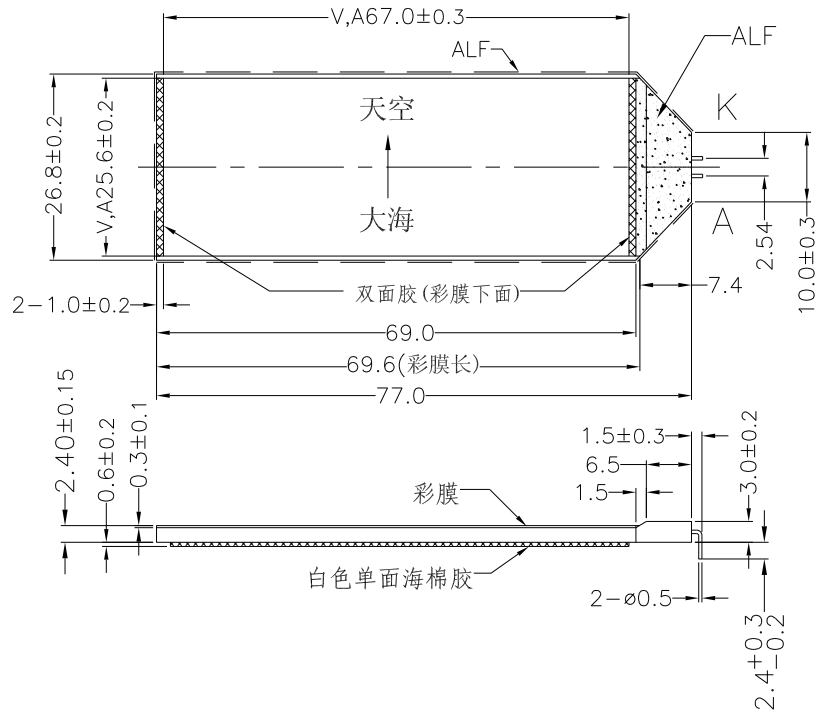

4. Test Point

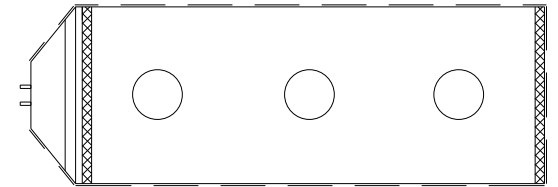


2. Electrical-Optical Characteristics ($T_a = 25^\circ C$)

Item	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Forward Voltage	Vf		3.0		V	If = 12~18mA
Peak Wave Length	??				nm	
Spectral Line Half Width	??				nm	
Uniformity	Avg	50			%	
Luminance	Lv	65	85		cd/m ²	
Reverse Current (Per LED)	Ir			10	uA	Vr = 10 V

• Operating Temperature: $-20 \sim +70^\circ C$ • Storage Temperature: $-30 \sim +80^\circ C$

3. Circuit Diagram (LED 1 SMT) Color: WHITE Package: LAMP



DIXIAN 帝显 深圳市帝显电子有限公司
 SHENZHEN DIXIAN ELECTRONIC CO., LTD

MODEL NO.:		SS241A-05	
CUSTOMER'S NO.:		OPT00212CTW-B	
SHEET 页码	THIRD ANGLE PROJECTION 	UNIT mm	
DESIGN: 设计			
CHECKED: 检查			
COUNTERSIGN: 复核			
APPROVED: 批准			
DRAWING No:	CUST图		REV A0