



1. Mechanical Outline (Unspecified Tolerances is ± 0.2)

- 1. □ : CRITICAL DIMENSION.
- 2. : REFERENCE DIMENSION.
- 3. : SAFETY CHARACTERISTIC.
- 4. ▽ : SPECIAL CHARACTERISTIC.
- 5. : RoHS COMPLIANCE.

ISSUE	AMENDMENT	DATE
A0	First issue	20070519

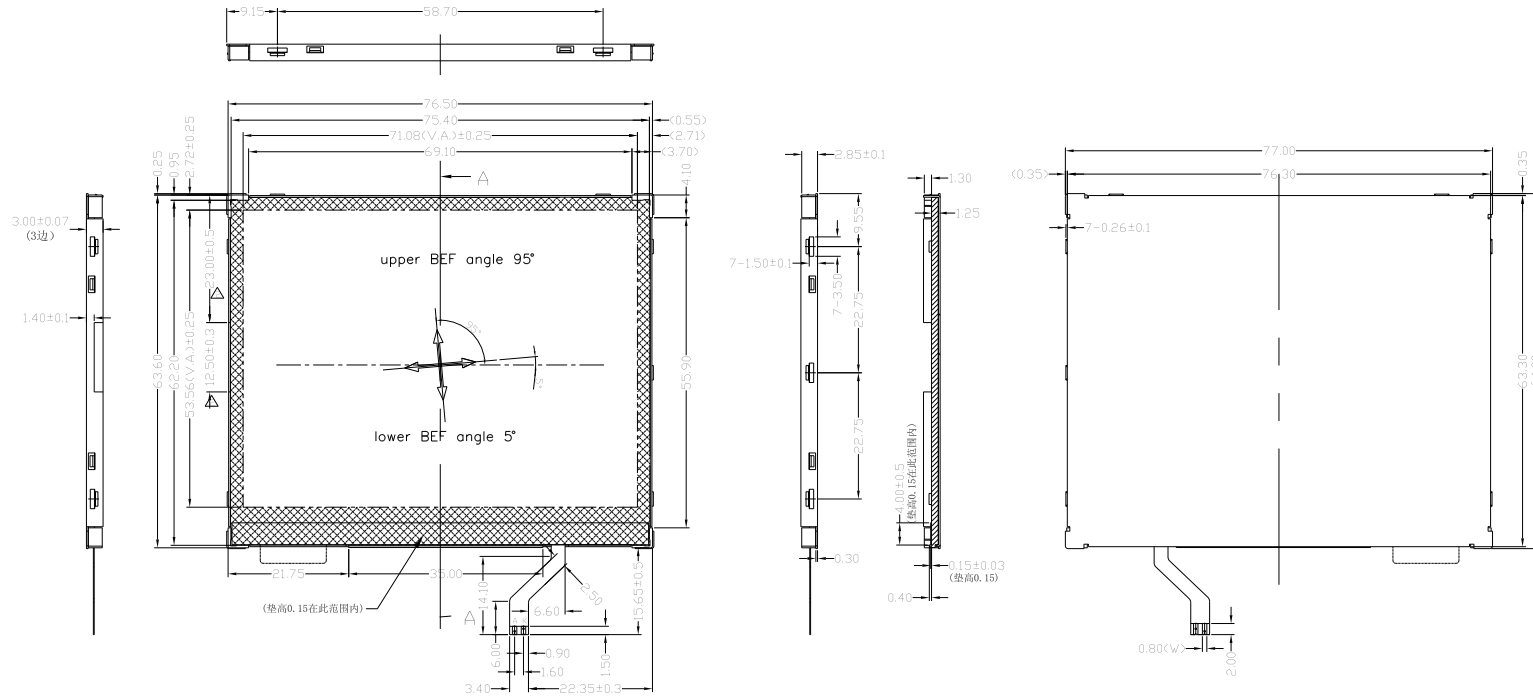

4. Test Point

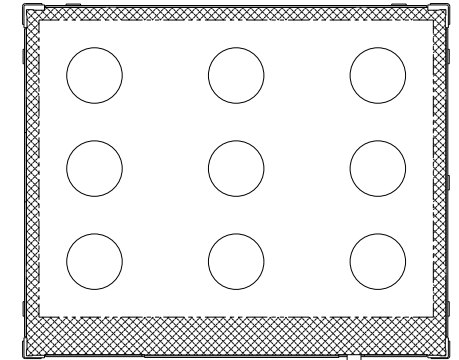

2. Electrical-Optical Characteristics (Ta=25°C)

Item	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Forward Voltage	Vf	18.0	18.9	19.8	V	If= 15 mA
Colour Coordinate (Tolerances is ±0.01)	x	0.25		0.29	--	
	y	0.25		0.29	--	
Uniformity	Avg	70			%	
Luminance	Lv	1800	2300	2800	cd/m²	
Reverse Current (Per LED)	Ir			20	mA	Vr= 0.8 V

• Operating Temperature: -20~+70°C • Storage Temperature: -30~+80°C

3. Circuit Diagram (LED 1X6=6 SMT) Color: WHITE Package: 335



DIXIAN 帝显 深圳市帝显电子有限公司
SHENZHEN DIXIAN ELECTRONIC CO., LTD

MODEL NO.:		SY024A-05	
CUSTOMER'S NO.:		BLB-S90065-1	
SHEET 页码	THIRD ANGLE PROJECTION 第三角投影	UNIT mm	
DESIGN: 设计			
CHECKED: 检查			
COUNTERSIGN: 复核			
APPROVED: 批准			
DRAWING No:	CUST图		REV A0